


INTERIOR LED RECESSED DOWN SPOTLIGHT

L01010



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium electroplating lighting fixture
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- OSRAM LED 3535
- Flicker Free, Remote LED Driver version. High PF
- Deeply recessed light source. High level of visual comfort
- 0/1-10V I Triac I DALI TW dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

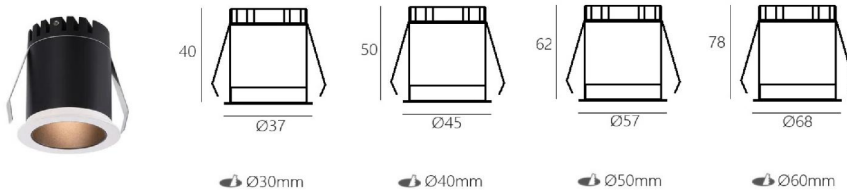

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L01010 -3	3W	190lm	Ø 37xH40mm	Ø 30mm	700mA
L01010 -5	5W	230lm	Ø 45xH50mm	Ø 40mm	100mA
L01010 -7	7W	420lm	Ø 57xH62mm	Ø 50mm	150mA
L01010 -10	10W	550lm	Ø 68xH78mm	Ø 60mm	250mA

FEATURES

Fixed spotlight with trim, visual comfort low glare optic with deeply recessed light source. Uniform distribution and soft light. Spring for easy installation. Easy to highlight the beauty. Create your customized light atmosphere. Easy lighting demand, for a wide scala of projects, from residential to hotels, restaurants, retail and much more. Customized color finishing, power changes are possible depending on the request and the quantity. cutout:Ø60mm | 24° 36°

Remote LED Driver

- 3W 700mA
- 5W 100mA
- 7W 150mA
- 10W 250mA

Accessoires



Beam Angle

- 15°
- 24°
- 36°

Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes

- Black
- White
- Customized