


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03085



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- CREE branded COB LED 3SDCM CRI90+
- 20° adjustable 355°rotation
- Ø81mm | Ø90mm
- 0/1-10V I Triac I DALI Tunable white dimming



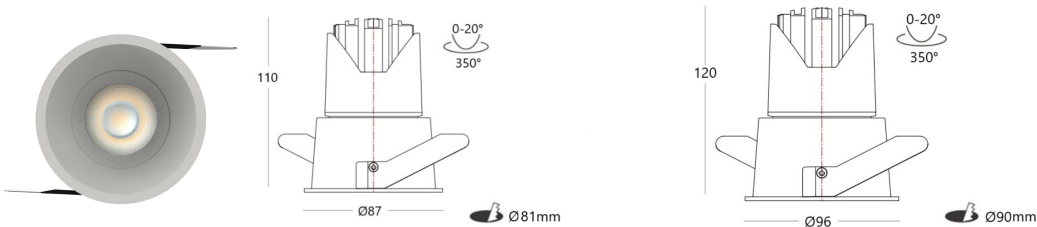









HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03085 -12	12W	1100lm	Ø 87xH110mm	Ø 81mm	300mA
L03085 -14	14W	1250lm	Ø 87xH110mm	Ø 81mm	350mA
L03085 -15	15W	1350lm	Ø 96xH120mm	Ø 90mm	350mA

FEATURES

20° adjustable 355°rotation spotlight, it comprise LED light module(F5445) and a metal mounting frame. Remote LED Driver version. Super slim trim, High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. The spotlight offer homogeneous and uniform light distribution. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. On the request it can be offered in any RAL colour, matching the specific look and feel of your design. IP54 rating on same one luminaries means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations. Dimming from 0~100%, down to 0.01%.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
12W 300mA 14W 350mA 15W 350mA	 Hex Louver	 15°  24°  36°  50°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized