
## INTERIOR LED RECESSED DOWNLIGHT

## L03162



① CLASS III
Ceiling, wall recessed.
Numinium lighting fixture, powder coated.
Flicker Free
Eyes friendly CE certificate RoHS standard
CRI CRI97 3SDCM CITIZEN COB LED
DALI Triac I 0/1-10V I DALI dimmable
Tunable White dimming
Warranty 5 Years

## HIGH LUMINOUS EFFICIENCY AND UNIFORM DISTRIBUTION.

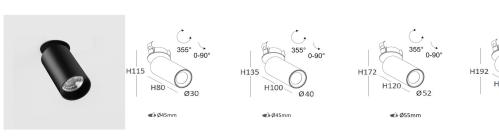

Code	System Power W	Output Lumen Im	Dimension mm	Cut Hole mm	Power Supply mA
L03162 -5	5W	450lm	Ø 30xH115mm	Ø 45mm	120mA
L03162 -10	10W	900lm	∅ 40xH135mm	Ø 45mm	250mA
L03162 -15	15W	1300lm	Ø 52xH172mm	Ø 55mm	350mA
L03162 -20	20W	1700lm	Ø 63xH192mm	Ø 55mm	500mA
L03162 -25	25W	2000lm	Ø 63xH192mm	Ø 55mm	600mA

## **FEATURES**

The spotlight achieved 90°adjustable 355°rotation, The high performances and flexibility for every project. High Definition optical lenses in thermoplastic material. - The ceilling recessed luminiaire with a decorative metal baffle. The new lens optic creates homogeneous lighting Uniform distribution. An ideal solution for accent lighting in residential or commercial. The basic model comes in white and black colors. Specialised optical filters can be ordered. Customized the color finishing of body and baffle or length of tube are possible depending on the request and the quantity. White OR Black color finishing as standard. - Customized power changes are possible depending on the request and the quantity. -On the request it can be offered in any RAL colour, matching the specific look and feel of your design.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
5W 120mA		150	07001/	
10W 250mA		15°	□ 2700K □ 3000K	Black
15W 350mA		<u> </u>	☐ 4000K	White
20W 500mA	diffills	<u> </u>	□ 5000K	Customized
25W 600mA	Hex Louver	<u>△</u> 55°	☐ 6000K	