


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03219




- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- CITIZEN COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- Deeply recessed light source. High level of visual comfort
- 0/1-10V | Triac | DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

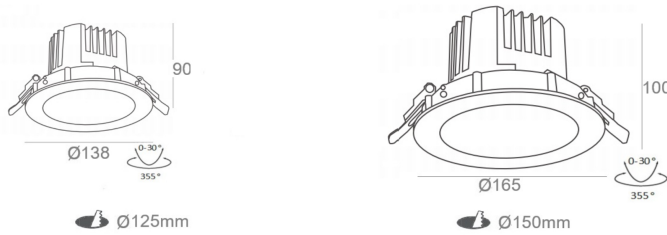


Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03219 -20	20W	1900lm	Ø 138xH90mm	Ø 125mm	500mA
L03219 -35	35W	3220lm	Ø 165xH100mm	Ø 150mm	850mA


Beam Angle 15° 12W 3000K

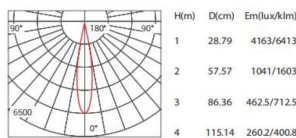

Beam Angle 24° 12W 3000K

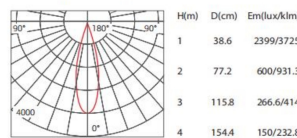

Beam Angle 38° 12W 3000K

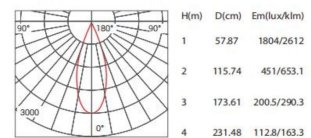

FEATURES

Adjustable spotlight, visual comfort low glare optic with recessed light source. One of the most impressive light spot, uniform distribution, clear and soft light. Available for multiple optic distributions. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. Spring for easy installation. Easy lighting demand, for a wide scala of projects, an ideal accent lighting in residential | home or commercial areas. 24°adjustable 355°rotation, the high performances and flexibility for every project for interior. The basic model comes in black RAL9005 or RAL9003 white colors. - The ABS materials baffle comes in multiple colors, Black | White | Gold. Customized color finishing, power changes are possible depending on the request and the quantity. citizen cob led 2-3SDCM. dimmable, 5 years warranty. It is presented to its customers as a clean and non-dazzling product.

Remote LED Driver

20W 500mA
35W 850mA

Accessoires



Beam Angle

- 15°
- 24°
- 36°
- 60°

Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes

- Black
- White
- Customized