


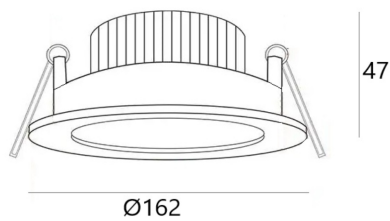
## INTERIOR LED RECESSED DOWNLIGHT


**L03244**



-  IP20
-  CLASS III
-  Europe Standard & CE Certificate. 220-240V 50/60Hz
-  Aluminium die casting material and powder coating
-  Ceiling wall recessed I Trim
-  400-600mm cable with quick connector
-  110° OSRAM SMD
-  140mm
-  Flicker Free I Remote LED Driver version.
-  DALI 0/1-10V I Triac I DALI dimming

### UNIFORM DISTRIBUTION



 Ø140 mm

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03244 -10	10W	750lm	Ø 162xH47mm	Ø 140mm	250mA
L03244 -18	18W	1350lm	Ø 162xH47mm	Ø 140mm	500mA

## FEATURES

The fixing downlight for general lighting, height reduced, PC diffuser, 110° OSRAM 2835 LED. The basic model comes in white or silver color. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation with metal springs. Easy lighting demand, for a wide scale of projects, from hotels, retail, commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product.

### Remote LED Driver

10W 250mA  
18W 500mA






### Accessoires

### Beam Angle





110°

### Color Temperature

-  2700K
-  3000K
-  4000K
-  5000K
-  6000K

### Finishes

-  Black
-  White
- Customized