


# INTERIOR LED RECESSED DOWN SPOTLIGHT

**L03245**



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium material and powder coating | Slim trim
- 81mm
- 400-600mm cable with quick connector
- CRI 90+
- Flicker Free, Remote LED Driver version. PF0.95
- Recessed light source. High level of visual comfort
- 0/1-10V | Triac | DALI Tunable white dimming

## UNIFORM DISTRIBUTION DIRECTIONAL LIGHTING

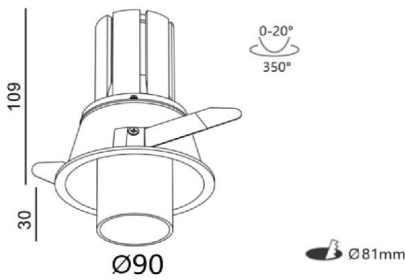

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03245 -12	12W	620lm	Ø 90xH110mm	Ø 81mm	300mA

## FEATURES

The spotlight comprise a LED light module Ø45 , a metal baffle and a metal mounting frame. 20°adjustable 360°rotation, Its principle is equivalent to modularity and flexibility at its best. Visual comfort low glare optic with recessed light source. High Definition optical lenses in thermoplastic material. Easy installations. The standard product comes in RAL 9005 Black color finishing | RAL 9016 White color finishing. On the request it can be offered in any RAL colour, matching the specific look and feel of your design. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. dimmable, dimming from 0~100%, down to 0.01%.

### Remote LED Driver

12W 300mA

### Accessoires



### Beam Angle

- 15°
- 24°
- 36°
- 50°

### Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

### Finishes

- Black
- White
- Customized