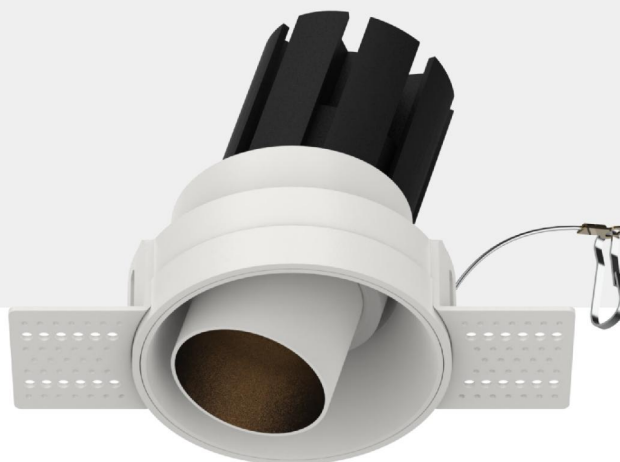












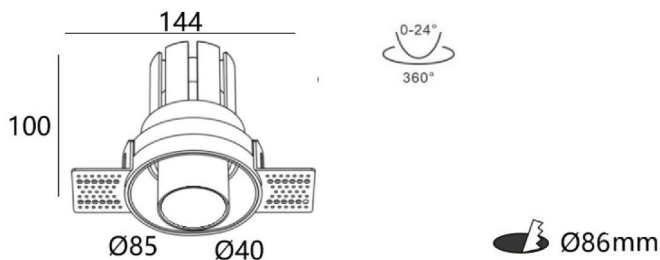
INTERIOR LED RECESSED DOWN SPOTLIGHT

L03248



-  IP54
-  CLASS III
-  Europe Standard & CE Certificate. 220-240V 50/60Hz
-  Aluminium die casting and powder coating.
-  Ceiling recessed, Plaster -in. Trimless
-  5years Warranty
-  Famous brand LED chips CRI90+ 3SDCM
-  Flicker Free, Remote LED Driver version. PF0.95
-  Deeply recessed light source | Visual comfort | Snoot
-  DALI Dimming from 0~100%, down to 0.01%.

AN IDEAL SOLUTION FOR ACCENT LIGHTING



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03248 -12	12W	700lm	Ø 144xH100mm	Ø 86mm	300mA

FEATURES

Round-shaped in cast aluminum with mounting frame for trimless installation on ceiling. Luminaires in this line have modular design. They comprise a LED light module, a metal baffle, snoot and a metal mounting frame. | It facilitates the installation by giving the opportunity to the installer to place the metal frame in advance. No need to worry for the LED light module in further finishing of the room, as the modules can be fixed into the installation frame afterwards by snap-in catch action. | Luminaire body inclusive of snoot-in aluminum, easy relamping via removable front ring by snap-in catch action. | The spotlight is vertical tilttable $\pm 30^\circ$ and 355° rotation. Its principle is equivalent to modularity and flexibility at its best and easy to handle, the light is emitted exactly where you want it. | The standard product comes in RAL9005 Black color or RAL9016 White color. On the request it can be offered in any RAL color, matching the specific look and feel of your design. | IP54 rating on same one luminaires means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations. | One housing achieved multiple options and different light distributions for a wide variety of applications, the new creating that meets the needs of your residential and commercial projects. Excellent colour rendering, it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. An ideal solution for accent lighting. Dimming from 0~100%, down to 0.01%.

Remote LED Driver

12W 300mA

Accessoires








Hex Louver

Beam Angle

-  15°
-  24°
-  36°

Color Temperature

-  2700K
-  3000K
-  4000K
-  5000K
-  6000K

Finishes

-  Black
-  White
-  Customized