



	code	w	lm	led	size (mm)	cut-out(mm)
Architectural Lighting	L06057-02	2.2	160	1	L41xW72xH49mm	42x41mm
High-Contrast						
Frameless Versions						
	L06057-04	4.5	330	2	L71xW72xH49mm	72x41mm
	L06057-10	12.5	937.5	5	L143xW72xH49mm	145x41mm
	L06057-20	25.5	1811	10	L276xW72xH49mm	277x41mm
	L06057-30	33.5	2278	15	L408xW72xH49mm	410x41mm

Color temperature	Finishes	Protection	Optic
2700K CRI >90	Black	IP20	15° 30° 45°
3000K CRI >90	White		
4000K CRI >90			
5000K CRI >90			



**Certification :** Europe Standard CE certificate

**Warranty :** 5years

**Material :** Die-cast aluminum and thermoplastic

**Technical description**

Linear miniaturised recessed luminaire with LED lamps - fixed optics - a few beam angle for option. Despite the ultra compact size of the product. the technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Version with perimeter surface frameless. High CRI.

**Installation :** Recessed with steel wire springs

**Mounting :** Wall recessed | ceiling recessed

**Power Supply :**

L06057-02	600mA	2.5-4Vdc	I	L06057-04	600mA	5-7Vdc	I	L06057-10	600mA	12-17Vdc
L06057-20	600mA	26-40Vdc	I	L06057-30	600mA	40-50Vdc				

Application

Hotel, Airport, Art Centre, Museum, Art Gallery, Restaurant, Home, Office, Shopping mall or other Commercial and Retail Spaces.

Optic



Spot (15°)



Flood (30°)



Wide Flood (45°)



Wall Washer



High CRI



2700K



3000K

3500K

4000K



True Red R9 = 92


Case Show





	code	w	lm	led	size (mm)	cut-out(mm)
Architectural Lighting High-Contrast Frameless Versions	L06057-02	2.2	160	1	L41xW72xH49mm	42x41mm

### Frameless Versions

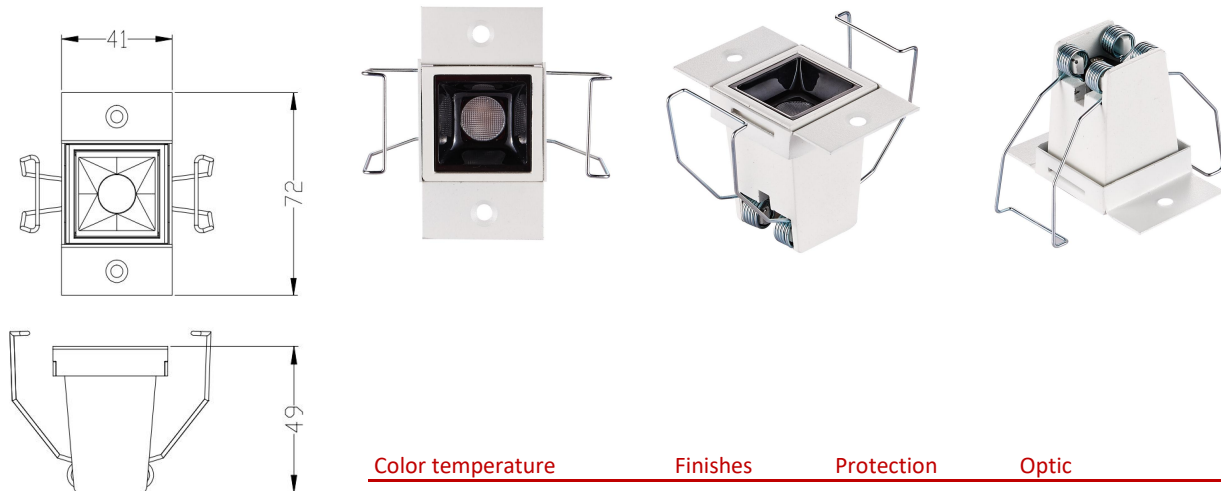

Color temperature	Finishes	Protection	Optic
2700K CRI >90	Black	IP20	Spot (15°)
3000K CRI >90	White		Flood (30°)
4000K CRI >90			Wide Flood (45°)
5000K CRI >90			Wall Washer



### Technical description

Square miniaturised recessed luminaire for single LED - fixed optic - a few beam angle for option. Despite the ultra compact size of the product. the technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Version with perimeter surface frameless. High CRI. Osram LED

Certification : Europe Standard CE certificate

Material : Die-cast aluminum and thermoplastic

Installation : Recessed with steel wire springs

Application : Hotel, Airport, Art Centre, Museum, Art Gallery, Restaurant, Home, Office, Shopping mall or other Commercial and Retail Spaces.

Power input : 2.2W 160lm

Dimensions: L41xW72xH49mm


Cut out: 42x41mm

Power Supply: 600mA 2.5-4Vdc



	code	w	lm	led	size (mm)	cut-out(mm)
Architectural Lighting High-Contrast Frameless Versions	L06057-04	4.5	330	2	L71xW72xH49mm	72x41mm

### Frameless Versions

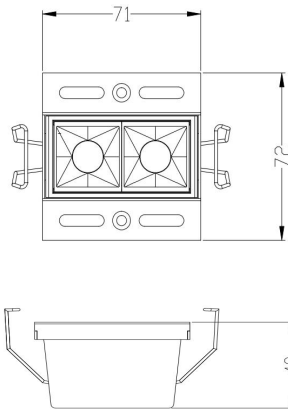

Color temperature	Finishes	Protection	Optic
2700K CRI >90	Black	IP20	Spot (15°)
3000K CRI >90	White		Flood (30°)
4000K CRI >90			Wide Flood (45°)
5000K CRI >90			Wall Washer



### Technical description

Rectangular miniaturised recessed luminaire for 2 optical elements with LED lamps - fixed optic - a few beam angle for option. Despite the ultra compact size of the product. the technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Version with perimeter surface frameless. High CRI. Osram LED

Certification : Europe Standard CE certificate

Material : Die-cast aluminum and thermoplastic

Installation : Recessed with steel wire springs

Application : Hotel, Airport, Art Centre, Museum, Art Gallery, Restaurant, Home, Office, Shopping mall or other Commercial and Retail Spaces.

Power input : 4.5W 330lm

Dimensions: L71xW72xH49mm


Cut out: 72x41mm

Power Supply: 600mA 5-7Vdc





	code	w	lm	led	size (mm)	cut-out(mm)
Architectural Lighting High-Contrast Frameless Versions	L06057-10	12.5	937.5	5	L143xW72xH49mm	145x41mm

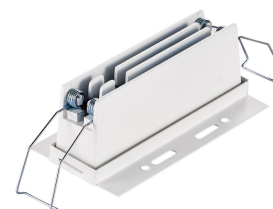

Color temperature	Finishes	Protection	Optic
2700K CRI >90	Black	IP20	Spot (15°)
3000K CRI >90	White		Flood (30°)
4000K CRI >90			Wide Flood (45°)
5000K CRI >90			Wall Washer



**Technical description**

Linear miniaturised recessed luminaire for 5 optical elements with LED lamps - fixed optic - a few beam angle for option. Despite the ultra compact size of the product, the technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Version with perimeter surface frameless. High CRI. Osram LED

Certification : Europe Standard CE certificate

Material : Die-cast aluminum and thermoplastic

Installation : Recessed with steel wire springs



Application : Hotel, Airport, Art Centre, Museum, Art Gallery, Restaurant, Home, Office, Shopping mall or other Commercial and Retail Spaces.

Power input : 12.5W 938lm

Dimensions: L143xW72xH49mm

Cut out: 145x41mm

Power Supply: 600mA 12-17Vdc

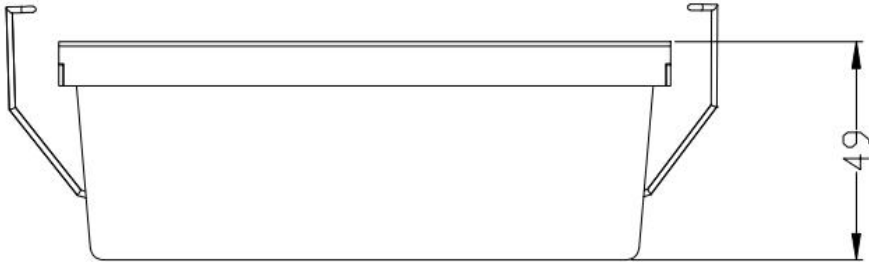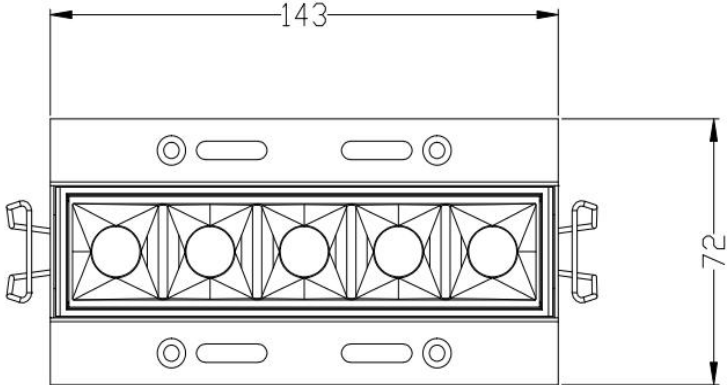



	code	w	lm	led	size (mm)	cut-out(mm)
Architectural Lighting High-Contrast Frameless Versions	L06057-20	25.5	1811	10	L276xW72xH49mm	277x41mm



Color temperature	Finishes	Protection	Optic
2700K CRI >90	Black	IP20	Spot (15°)
3000K CRI >90	White		Flood (30°)
4000K CRI >90			Wide Flood (45°)
5000K CRI >90			Wall Washer



**Technical description**

Linear miniaturised recessed luminaire for 10 optical elements with LED lamps - fixed optic - a few beam angle for option. Despite the ultra compact size of the product. the technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Version with perimeter surface frameless. High CRI. Osram LED

Certification : Europe Standard CE certificate

Material : Die-cast aluminum and thermoplastic

Installation : Recessed with steel wire springs

Application : Hotel, Airport, Art Centre, Museum, Art Gallery, Restaurant, Home, Office, Shopping mall or other Commercial and Retail Spaces.


Power input : 25.5W 1811lm

Dimensions: L276xW72xH49mm

Cut out: 277x41mm

Power Supply: 600mA 26-40Vdc



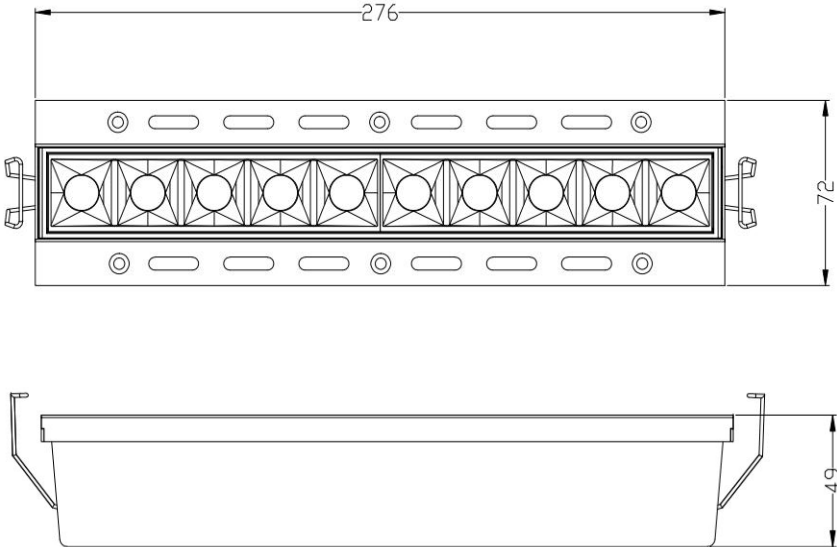



	code	w	lm	led	size (mm)	cut-out(mm)
Architectural Lighting High-Contrast Frameless Versions	L06057-30	33.5	2278	15	L408xW72xH49mm	410x41mm



Color temperature	Finishes	Protection	Optic
2700K CRI >90	Black	IP20	Spot (15°)
3000K CRI >90	White		Flood (30°)
4000K CRI >90			Wide Flood (45°)
5000K CRI >90			Wall Washer



**Technical description**

Linear miniaturised recessed luminaire for 15 optical elements with LED lamps - fixed optic - a few beam angle for option. Despite the ultra compact size of the product. the technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Version with perimeter surface frameless. High CRI. Osram LED

Certification : Europe Standard CE certificate

Material : Die-cast aluminum and thermoplastic

Installation : Recessed with steel wire springs

Application : Hotel, Airport, Art Centre, Museum, Art Gallery, Restaurant, Home, Office, Shopping mall or other Commercial and Retail Spaces.

Power input : 33.5W 2278lm

Dimensions: L408xW72xH49mm

Cut out: 410x41mm

Power Supply: 600mA 40-50Vdc

