


INTERIOR LED RECESSED DOWN SPOTLIGHT

L06170



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- COB LED 3SDCM CRI97
- Flicker Free, Remote LED Driver version. PF0.95
- Deeply recessed light source. High level of visual comfort
- 0/1-10V | Triac | DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

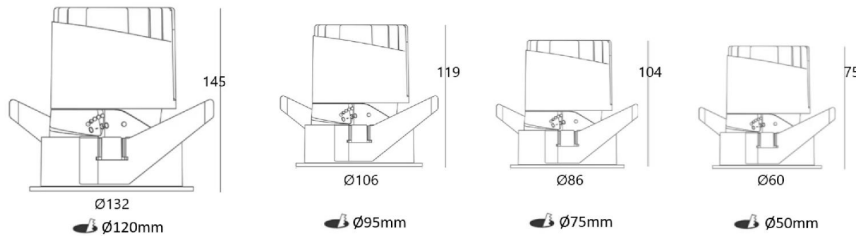

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L06170 -6	6W	400lm	Ø 60xH75mm	Ø 50mm	150mA
L06170 -15	15W	1200lm	Ø 86xH104mm	Ø 75mm	350mA
L06170 -23	23W	1850lm	Ø 106xH119mm	Ø 95mm	550mA
L06170 -35	35W	2600lm	Ø 132xH145mm	Ø 120mm	750mA

FEATURES

The fixing spotlight with slim trim, visual comfort low glare optic. Uniform distribution. Metal reflector , Available for a few different output beams 15/24/36/60°. Specialised optical filters honeycomb can be ordered. Steel spring for easy installation. The decorative secondary optic available in multiple color finishing, Gold | Silver | Black | White | Chromed. The basic model comes in white(RAL9010) or black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Easy lighting demand, for a wide scale of projects, from hotels, retail , commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product. It is presented to its customers as a clean and non-dazzling product. Customized color finishing, power changes are possible depending on the request and the quantity.

Remote LED Driver

6W 150mA
15W 350mA
23W 550mA
35W 750mA

Accessories



Beam Angle

15°
24°
36°
60°

Color Temperature

2700K
3000K
4000K
5000K
6000K

Finishes

Black
White
Customized