


LED SPOTLIGHT

L70105



- IP67
- CLASS III
- Insert into the ground Installation
- ECO Energy Saving
- Flicker Free
- Eyes friendly CE certificate RoHS standard
- CRI90+ OSRAM SMD LED
- CE Europe Standard & CE Certificate. DC12-24V.
- 400-600mm cable with quick connector
- DALI I Triac I 0/1-10V dimmable

An ideal accent lighting in residential or commercial places

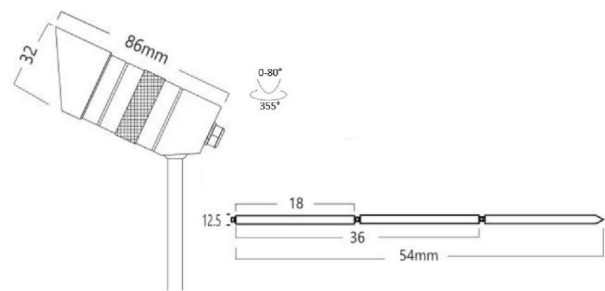

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L70105 -3	3W	190lm	Ø 32xH86mm	Ø mm	500mA

FEATURES

The IP67 lighting fixture matched 80° adjustable and 355°rotatable, suitable for light up anywhere. Lens version, 30° output for a better visual comfort. Osram branded LED. Aluminium materials - black color finishing as standard.it can be offered in any RAL colour, matching the specific look and feel of your design. Matched main dimming and Dali dimming. Insert into the ground installation as standard. Recessed installation can be customized. 50000hours life time. DC12-24V.

Remote LED Driver

Accessoires

3W 500mA

Beam Angle



Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes

- Black
- White
- Customized