


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03255



-  IP20
-  CLASS III
-  Europe Standard & CE Certificate. 220-240V 50/60Hz
-  Aluminium die casting material and powder coating
-  Ceiling recessed, Ceiling thickness 3-25mm
-  400-600mm cable with quick connector
-  CREE branded COB LED 3SDCM CRI90+
-  24° adjustable 355°rotation
-  Ø78mm
-  0/1-10V I Triac I DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

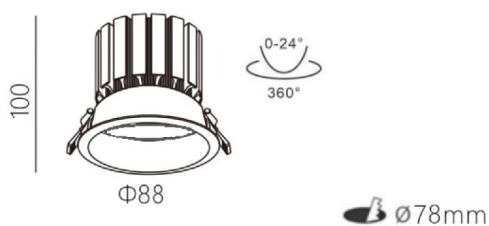

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03255 -12	12W	1100lm	Ø 88xH100mm	Ø 78mm	300mA
L03255 -15	15W	1350lm	Ø 88xH100mm	Ø 78mm	350mA

FEATURES

24° adjustable 355°rotation spotlight, High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. The spotlight offer homogeneous and uniform light distribution. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. On the request it can be offered in any RAL colour, matching the specific look and feel of your design. Dimming from 0~100%, down to 0.01%.

Remote LED Driver

12W 300mA
15W 350mA

Accessoires



Beam Angle

-  15°
-  24°
-  36°
-  50°

Color Temperature

-  2700K
-  3000K
-  4000K
-  5000K
-  6000K

Finishes

-  Black
-  White
-  Customized